




SPM TOOLS

Fully
Automatic

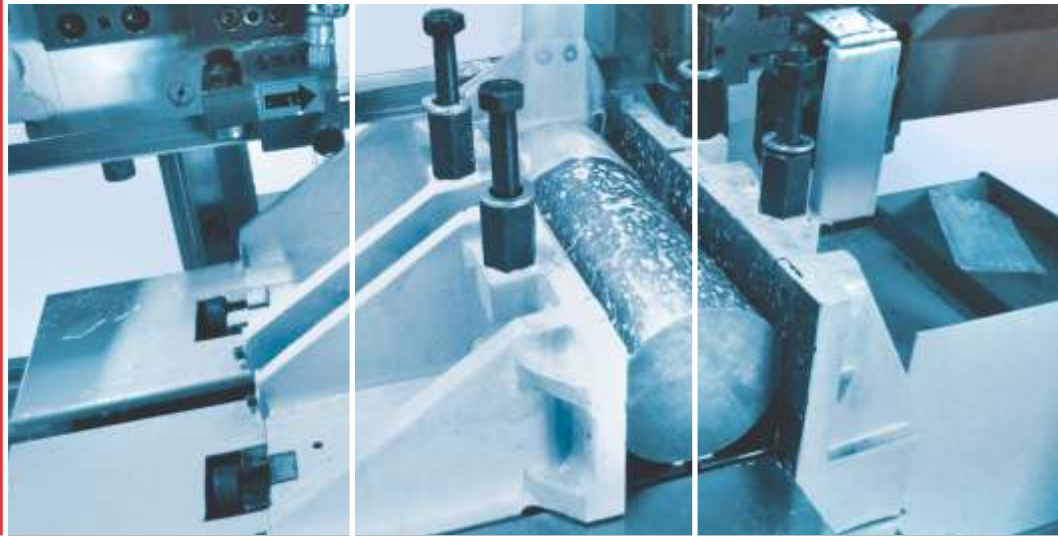

Double Column Band Sawing Machine

DCA-160

- Rugged & Heavy Duty
- Better Cutting Performance
- Highly Productive
- Higher Cutting Rate





Horizontal Double Column Band Sawing Machine, Model DCA-160

"SPM" Horizontal Double Column Fully Automatic Band Saw Machine DCA -160 is a very rigid, sturdy machine and torsion free in construction.

SAW HEAD :

Saw Head unit is supported by two rigid hard-chrome plated and ground vertical columns and sturdy C. I. frame well lubricated.

The blade is guided by rollers and released manually. The blade is manually tightened to the recommended tensile strength for the Saw Blade. The saw has sufficient drive power. The rapid approach system ensures that minimum time is taken even for small jobs.

SAW FEED :

Saw Feed "Up and Down" motion is controlled by hydraulic cylinder and regulated by a pressure regulated feed valve .

CLAMPING & FEEDING :

This is controlled by hydraulic vices. The jaws of front and rear vices are in one straight line and perpendicular to the blade.

The moving jaws of both the vice clamp the job with sufficient infinitely variable hydraulic pressure for safe clamping of hollow & thin walled tubes too. Both jaws of the rear feeding vice are withdrawn hydraulically on declamping. This ensures that feed vice moves backward freely even if bends exists on the forged or rough bars.

PRE-SELECTION COUNTER :

Pre-determined No of pieces to be cut, can be set on the piece counter and the machine stops after cutting the set quantity.

CUT-OFF-LENGTH :

It can be set upto 0.1mm on the mechanical digital counter by a hand wheel.

ACCURACIES :

Length \pm 0.2mm, Taper 0.1mm for 100mm \varnothing

CHIP CONVEYOR (Optional) :

Chip Conveyor can be provided at an extra cost , to remove Swarf from the machine.

BLADE WHEELS :

400mm dia 2 Nos. wheels with 45° inclination and center distance gives smooth blade performance.

SAFETY :

Adequate safety guards necessary interlocks are provided for safe working of the machine. Automatic stop of saw and saw frame down are the other features of the machine.

POWER SWARF BRUSH :

Power driven band brush, mounted on straight shaft and two ball bearings is provided for efficient chip removal.

SPECIFICATION :

Cutting Range	\square \varnothing 160mm
Feed Length Range	0-400mm
Construction	Double Column
Cutting Speeds (Stepped Pulley - 4speeds)	25-100 m/min
Total Power	4.2 HP
Operating Voltage	440V, 50 Hz, 3ph
Space Requirement	1820 x 2000 mm
Net Weight	1.5 tonnes
Height	1500mm
Blade Size	3505x27x0.9mm
Band Tension	Manual
Saw Feed Control	Hydraulic
Head Elevation, clamping & feed vices	Hydraulic

STANDARD EQUIPMENTS :

- 1) Complete electrical equipment including motors.
- 2) Complete hydraulic system
- 3) Complete Coolant system with pump & piping.
- 4) Power driven band brush for Chip Removal.
- 5) Gear box with worm & worm wheel
- 6) One Bimetal blade
- 7) Operating tools & spanners

OPTIONAL EQUIPMENTS :

- 1) Chip Brushes
- 2) Roller Table 1500mm/2000mm
- 3) Bimetal Band Saw Blade
- 4) Variable Vice Pressure
- 5) Hydraulic Band Tensioning
- 6) PIV Drive
- 7) Chip Conveyor
- 8) Nesting Fixture for bundle clamping

Due to continuous improvement of the product, SPM reserves all rights to change the above specifications without any prior notice.



SPM TOOLS

Corporate Office :

Sector A, Plot No. 4,5,6,7, Parvati Co-op. Ind. Estate, YADRAV-416 145, Dist : Kolhapur, Maharashtra (INDIA)

T : +91 2322 252590
F : +91 2322 252592
E : marketing@spmttools.in
spmttools.ichal@gmail.com
U : www.spmttools.co.in

FIE Group Company

M/s. Sree Engineers

#11, 3rd Main, 4th Cross, 4th Phase, 7th Block, Banashankari 3rd Stage, BANGALORE -560085.
T : +91 80 26695857, F : +91 80 26797895
C : +91 9448385857, E : sreeeng@vsnl.net

M/s. RGK Engineering Enterprises (P) Ltd.

No. 218, Karthik Krupa, saraswati Nagar, Vijay Nagar, BANGALORE -560040.
T : +91 80 23381641, 23303110
F : +91 80 23147882
C : +91 9845018313
E : narayanan_rgk@yahoo.co.in

M/s. Quality Sales & Service

68/3/1A, Bidhan Nagar Road, KOLKATTA -700 007
T : +91 33 23566199, Telefax : +91 33 23566202
C : +91 9433112128
E : quality_org@yahoo.co.in, quality_org@rediffmail.com

M/s. Precimech India (P) Ltd.

A-402, Priyadarshini Society, Plot No. 17, Patpar Ganj, DELHI-110 092
T : +91 11 65266171, 22611292
C : +91 9810195966, E : pmikuk@gmail.com

M/s. Amey Engineers & Traders

B-23/27, Jeevan Pushpa, Behind Ambika Darshan, Nana Shankar Seth Road, DOMBIVLI (W)-421 202, Dist. : Thane
T : +91 251 2480490, F : +91 251 2490918
C : +91 9324803266
E : aet@vsnl.com, ameyengineers@hotmail.com

Pune Region Contact : +91 9881236403